

Model **SBP-R·S** SINGLE TYPE PERMANENT MAGNETIC SINE BAR CHUCK

S type



SBP-R1018S-B


Gauge block not included.

[Application]

A laterally long type with the long side as the tilting axis for highly precise grinding and measurement.

[Features]

- A flat type as thin as 89 mm to 100 mm for a wide range of applications. With a thin permanent magnetic chuck mounted, this single type has been precisely finished to 0.007 mm or better.
- The whole sine bar part is made of special steel, which has been precisely ground after hardening.
- The major parts have been lapped to ensure highly precise grinding and measurement over a long period of time.
- Since a thin permanent magnetic chuck is used, this model is easy to handle and provides a wider machining space.
- These chucks employ a permanent magnet and therefore no heat is generated, which enables highly precise grinding.

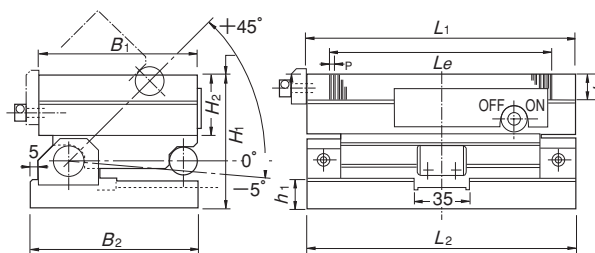

[mm (in)]

Model	Nominal Size	Work Face				Pole Pitch <i>P</i>	Mounting Face			Height		Height at Max. Tilt	Tilt Angle	Angle Accuracy	Roller Center Distance	Mass	
		<i>B</i> ₁	<i>L</i> ₁	<i>t</i>	<i>L</i> _e		<i>B</i> ₂	<i>L</i> ₂	<i>h</i> ₁	<i>H</i> ₁	<i>H</i> ₂						
SBP-R1018S-B	105 (41.3) × 175 (6.89)	105 (4.13)	175 (6.89)		142 (5.59)	3 (1+2) 0.11 (0.03+0.07)	110 (4.33)	175 (6.89)	20 (0.78)	89 (3.50)		(117) (4.60)	-5° -45°	0.007 / 100 max.	75 (2.95)	9kg / 20 lb	
SBP-R1530S-B	150 (5.90) × 300 (11.8)	150 (5.90)	300 (11.8)	18 (0.70)	256 (10.0)		160 (6.29)	300 (11.8)	27 (1.06)	96 (3.78)	40 (1.57)				(172) (6.77)	125 (4.92)	27kg / 60 lb
SBP-R1545S-B	150 (5.90) × 450 (17.7)		450 (17.7)		394 (15.5)			450 (17.7)	31 (1.22)	100 (3.93)							125 (4.92)

※A hex wrench key is included. For the mechanism of angle setting, see the bottom part on page 51. The conversion table included with the product facilitates angle setting.

Model **SBP-R·L** SINGLE TYPE PERMANENT MAGNETIC SINE BAR CHUCK

L type



SBP-R1018L-B


Gauge block not included.

[Application]

A longitudinally long type with the short side as the tilting axis for highly precise grinding and measurement. Suitable for highly precise angle grinding on mold grinders, etc.

[Features]

- A grip is provided to facilitate angle setting in the longitudinal direction.

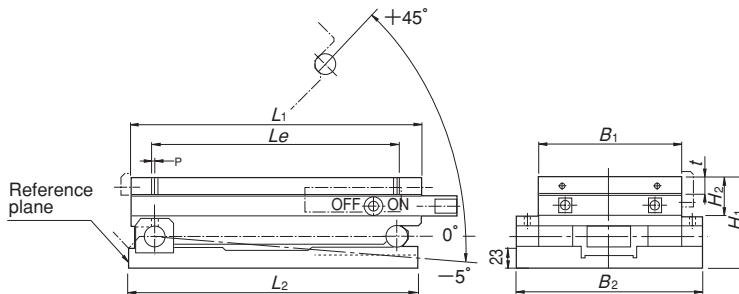

[mm (in)]

Model	Nominal Size	Work Face				Pole Pitch <i>P</i>	Mounting Face			Height		Height at Max. Tilt	Tilt Angle	Angle Accuracy	Roller Center Distance	Mass	
		<i>B</i> ₁	<i>L</i> ₁	<i>t</i>	<i>L</i> _e		<i>B</i> ₂	<i>L</i> ₂	<i>H</i> ₁	<i>H</i> ₂							
SBP-R1018L-B	105 (4.13) × 175 (6.89)	105 (4.13)	175 (6.89)	18 (0.70)	142 (5.59)	3 (1+2) 0.11 (0.03+0.07)	151 (5.94)	175 (6.89)	89 (3.50)	40 (1.57)		(175.5) (6.90)	-5° -45°	0.007 / 100 max.	125 (4.92)	11kg / 24 lb	
SBP-R1530L-B	150 (5.90) × 300 (11.8)	150 (5.90)	300 (11.8)		256 (10.0)		196 (7.71)	300 (11.8)	103 (4.05)						(272) (10.7)	250 (9.84)	32kg / 71 lb

※The tilting base setscrews are 6 mm wide across flats. A hex wrench key is included. For the mechanism of angle setting, see the bottom part on page 51. The conversion table included with the product facilitates angle setting.

ELECTROMAGNETIC CHUCKS
CHUCK CONTROLLERS
PERMANENT MAGNETIC CHUCKS
PERMANENT ELECTROMAGNETIC CHUCKS
BLOCKS FOR MC
VACUUM CHUCKS
PROMELTA* SYSTEM
SINE BAR CHUCKS
BLOCKS, HOLDERS, MINI CHUCKS
HOLDING TOOLS
MEASURING TOOL HOLDERS
MAGNETIC HOLDERS
MAGNETIC TOOLS