


Model KOK MAGNETIC HOLDER

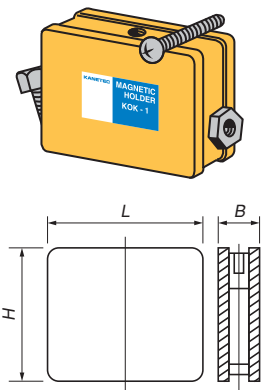

[Application]

Versatile holders having four attractive faces to meet various applications. These holders also have threaded holes to enable fixtures to be mounted for connection.

| Model | Holding Power | Dimensions | | | Tapped Hole | Mass |
|-------|---------------|-------------|-----|----|------------------|--------------|
| | | B | L | H | | |
| KOK-1 | 200N (20kgf) | 17.0 (0.66) | 50 | 40 | M5 (0.19) × 0.33 | 150g/0.33 lb |
| KOK-2 | 300N (30kgf) | 27.6 (1.08) | 100 | 50 | M5 (0.19) × 0.61 | 280g/0.61 lb |

※The holding power applies to SS400, thickness 10mm and ground surface.

Model KOC CABLE HANGER



[Application]

Most suitable for holding welding cable, for putting fixtures in order on work sites of shipbuilding, iron and steel manufacturing, bridge building, canneries and similar operations.

[Features]

- Strong holding power capable of destacking stacked thin iron sheets.
- Lateral sliding resistance of 80N (8kgf) gives the hanger good holding power.

| Model | Holding Power | Dimensions | | | Mass |
|--------|---------------|------------|-------------|-----------|--------------|
| | | Length | Width | Height | |
| KOC-1A | 300N (30kgf) | 50 (1.96) | 27.6 (1.08) | 40 (1.57) | 400g/0.88 lb |


※The holding power applies to SS400, thickness 10mm and ground surface.
※Height of hook part 87 mm.

Model KOC MAGNETIC HANGER

Strong type



Dedicated hanger included.

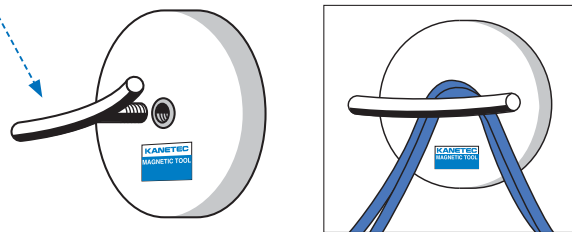

[Application]

Powerful magnetic hangerholder most suitable for cable arrangement and provisional wiring work on sites. Applicable to a wide range of uses as a hanger, since it powerfully attaches sheets, steel lockers, refrigerators, etc.

| Model | Holding Power | Dimensions | Hanger Setting Screw | Mass |
|--------|---------------|------------------------|------------------------|--------------|
| KOC-70 | 130N (13kgf) | φ66 (2.59) × 11 (0.43) | M6 (0.23) × 1.0 (0.03) | 210g/0.46 lb |
| KOC-80 | 300N (30kgf) | φ80 (3.15) × 13 (0.51) | M6 (0.23) × 1.0 (0.03) | 330g/0.72 lb |

※The holding power applies to SS400, thickness 10mm and ground surface.

Model WK POWERFUL MAGNETIC HOLDER




[Application]

Suitable as holding tools for tentative installation and tack welding on such work sites of construction, bridge, ship building and piping.

[Features]

- There are three faces where additional machining (such as drilling) can be done. (Refer to the dimension drawing)
- The exterior is made of aluminum to prevent adhesion of iron powder to the top and side faces.
- Model WK-TP has a construction that is highly resistant to heat.

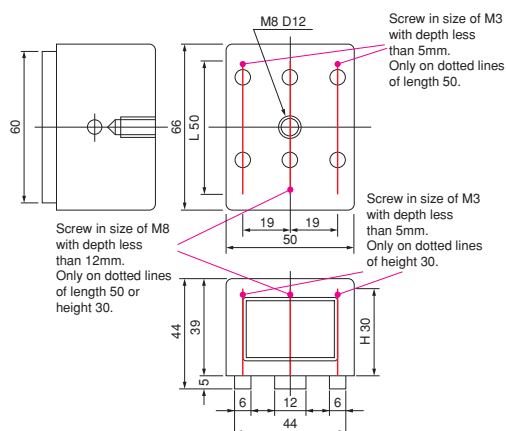

| Model | Heat Resistance | Holding Power | Mass |
|-------|-----------------|----------------|----------------|
| WK-P | 60°C | 1000N (100kgf) | 0.75kg/1.65 lb |
| WK-TP | 180°C | | |

※The holding power applies to SS400, thickness 10mm and ground surface.

ELECTROMAGNETIC CHUCKS
CHUCK CONTROLLERS
PERMANENT ELECTROMAGNETIC CHUCKS
MAGNETIC CHUCKS
PERMANENT ELECTROMAGNETIC CHUCKS
MAGNETIC CHUCKS
BLOCKS FOR MC
VACUUM CHUCKS
PROMELTA SYSTEM
SINE BAR CHUCKS
MAGNETIC BLOCKS
WORKING TOOLS
MEASURING TOOL HOLDERS
MAGNETIC HOLDERS
MAGNETIC TOOLS