MAGNETIC EQUIPMENT FOR TRANSPORTATION





Model KPR-A SMALL PERMANENT MAGNETIC ROLLER

The magnetic rollers that are frequently used for transportation (including transportation stopping) of steel pipes and they have been standardized and kept in stock.

Precaution for use

These products are assembled by bonding. For high temperature services and rubber lining, structural restrictions must be taken into consideration. Please contact us for more information.





[mm(in)] Dimensions Model Mass D В d₂ d b S 10 50 35 KPR-0504A 12(0.47) M5 22 (0.86 0.45kg/0.99 lb (1.37 (0.39) (1.96 70 40 KPR-0704A 20(0.78) 35(1.37) 1.0 kg/2.20 lb (2.75 (1.57 12 M6 100 50 (0.47) KPR-1005A 30(1.18) 45(1.77) 2.4 kg/5.29 lb (3.93 (1.96) 120 60 16 KPR-1206A 40(1.57 M8 60 (2.36 3.8 kg/8.39 lb

%A powerful model, KPR-H (12,000G), is also available.

Model KER ELECTROMAGNETIC ROLLER

[Application]

This model employs a powerful electromagnet and its optimum design helps increase the efficiency of transportation of steel pipes and steel plates.

[Features]

•The electromagnetic rollers can easily be turned on and off or adjusted in magnetic force for easy attracting and repelling of iron products.

(Specification)

•For the standard type dimensions, refer to the electromagnetic pulley KER.

Model KPR PERMANENT MAGNETIC ROLLER

[Application]

Most suitable for holding thin steel plates of 0.2 to 0.4 mm thick such as printing rollers.

{Specification>
750 rpm max.

Remarks) In case balance adjustments are required, please contact Kanetec.

Please refer to Facsimile communication Form.

117

MAGNETIC TOOLS FOR WELDING OPERATION

LIFTING MAGNET

MAGBORE

ENVIRONMENTAL CHIP & SLUDGE EQUIPMENT TRANSPORTERS

MAGNETIZERS AND DEMAGNETIZERS

Magnetic Equipment For transportation

MAGNETIC SEPARATORS

HIGH GRADE MAGNETIC SEPARATORS


IRING

MEASUI

INSTRUMENTS

MEASURING

MAGNETIC MATERIALS

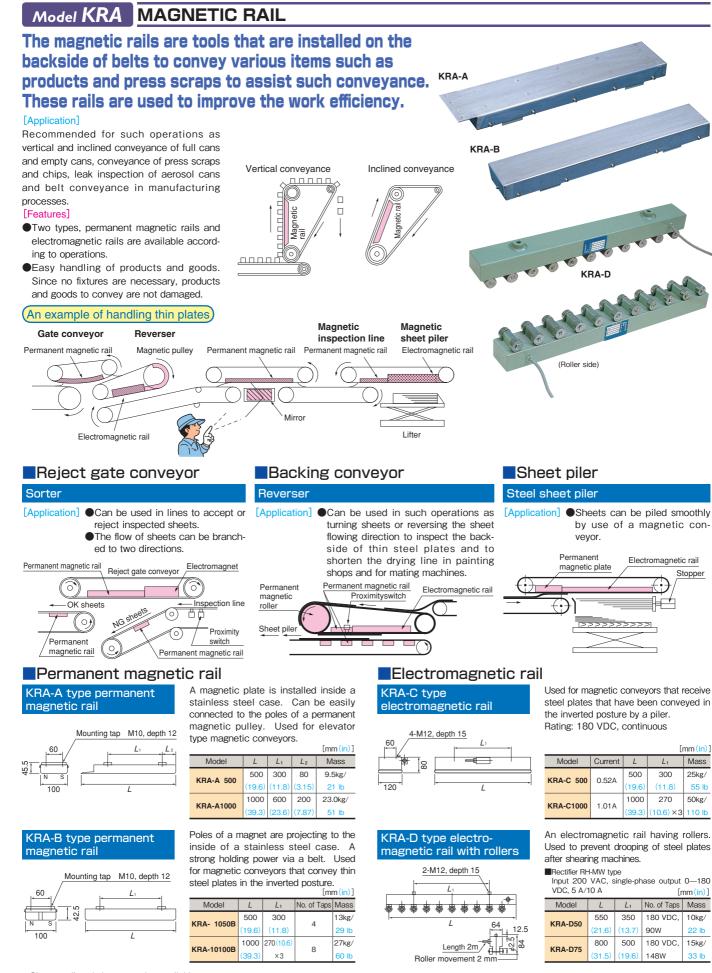


*Sizes not listed above are also available upon request

COMAGNETIC EQUIPMENT FOR TRANSPORTATION

PME

Model PME MAGNETIC CONVEYOR MAGCON*

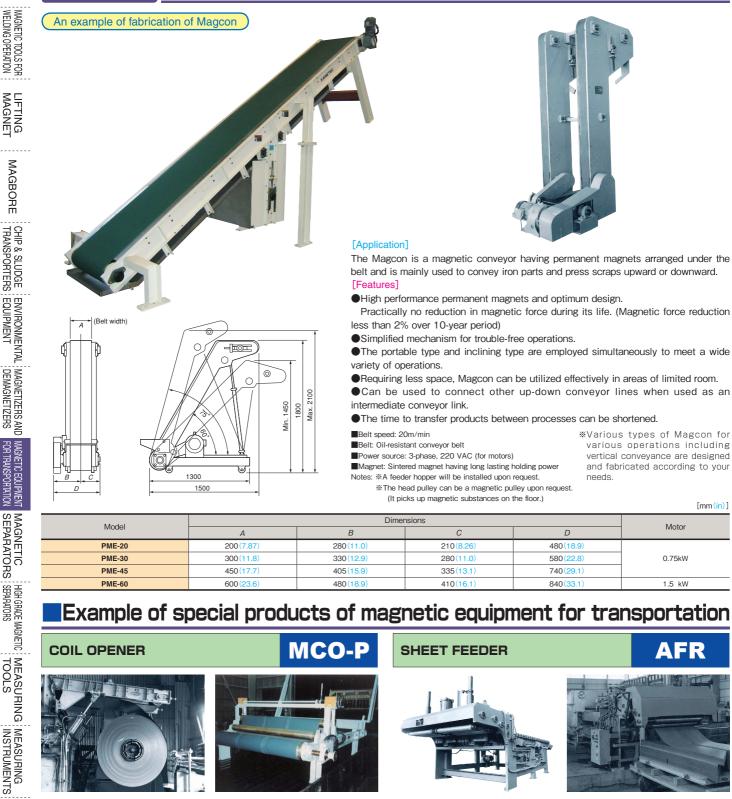

Model	Dimensions				Motor
	А	В	С	D	WOLDI
PME-20	200 (7.87)	280 (11.0)	210(8.26)	480(18.9)	
PME-30	300 (11.8)	330 (12.9)	280(11.0)	580 (22.8)	0.75kW
PME-45	450 (17.7)	405 (15.9)	335(13.1)	740(29.1)	
PME-60	600 (23.6)	480 (18.9)	410(16.1)	840(33.1)	1.5 kW

Example of special products of magnetic equipment for transportation

COIL OPENER



MCO-P

[Application]

Coil opener, for operator efficiency and safety. This equipment bites into the top edge of the coil automatically, used in various factories, steel mills, steel suppliers, etc.

Applicable for strip coil,

- •Material, ordinary steel plate, silicon steel, colored steel plate, plated steel, surface coated steel, etc. •Width: 10-2,000mm
- Thickness of plate: 0.2-3.0mm Revolution speed: normally 30m/min.







[mm(in)]

[Application]

Equipment for feeding silicon steel into baking furnace such as in electric appliance manufacturing; thin steel plate to load to remove from press machines, or for transporting and handling cut plate.

[Features]

- Designed with strong permanent magnets, for continuously strong attraction power. Electric power not required.
- Combined rotating movement of the roller and reciprocating movement of the cylinders makes a simple efficient design.
- One plate is fed out with each up and down cycle of the cylinder. Efficient for use in relatively small production runs.
- Light weight efficient size makes installation and handling easy.

MAGNETIC

FOR TRANSPORTATION